



SIGMA

VERTICAL PLATFORMLIFT



That's why you can
count on **LEHNER LIFTTECHNIK...**

SOLUTION ORIENTATION

Our lifts are custom-made products that are adapted precisely to the local conditions. We look for solutions where others give up and thus offer a significant advantage.

RELIABILITY

The durability of our products is a top priority for us. Our portfolio includes reliable mobility solutions that guarantee low-maintenance operation.

PRICE/PERFORMANCE

We stand for affordable, high-quality lift systems. It is always our aim to offer our customers outstanding products at attractive prices.



High-quality
lift systems
that impress

SAFETY

Safety is our top priority: Our lift systems are manufactured to the highest safety standards. This guarantees safe use for many years.

HUMANITY

People always count for us. All our daily efforts are aimed at maximizing the independence of the users of our products.

EXPERIENCE

The dynamic team around company founder Max Lehner has been working for more than 30 years to enable barrier-free living with our reliable lifts at



„We are proud that our lifts contribute to improving the lives of people with mobility impairments around the world every day“

Company founder Max Lehner

CERTIFIED

Certification in accordance with the applicable EU Machinery Directive allows lifting heights of over 3 metres, even with an open platform.*

ELEGANT

The **Sigma** vertical platform lift impresses with its modern design and high-quality construction.

ROBUST

The **Sigma** is designed for indoor and outdoor use. Aluminum components ensure optimum corrosion protection.

SAFE

Maximum safety is the top priority. This is guaranteed by the integrated emergency power supply and platform lighting.

AESTHETICS AND SAFETY COMBINED IN ONE PRODUCT

Numerous well thought-out details make the **Sigma** vertical platform-lift the perfect mobility solution for **lifting heights up to 8 metres**.

MAIN ADVANTAGES

- Double chain drive for comfortable operation
- Maximum safety thanks to safety floor, innovative safety gear and electric emergency lowering system
- Aluminum components guarantee corrosion protection and low weight
- Radio external control (optionally on supports or portable)
- Ideal solution for retrofitting in private and public areas
- Certified in accordance with the applicable EU Machinery Directive



PLATFORM LIGHTING

Ensures safe use around the clock



INTEGRATED ACCESS RAMP

This means that neither a pit nor a fixed ramp is required on site at the lower stop



ELEGANT FINISH

The **Sigma** blends aesthetically into its surroundings thanks to its low installation height of just 1100 millimetres at

TIP

When purchasing a vertical platform lift, make sure that it has an **integrated emergency power supply**. This guarantees safe emergency lowering of the lift even in the event of a power failure.



High-quality construction for a wide range of locations



CONTROL



Ergonomic control
in the platform



Wireless remote control
optional on pillar



Control with app
on smartphone (optional)



TIP

When purchasing, make sure that the lift has **platform lighting** as standard. This allows you to use the lift comfortably at any time of day.

FOR ALL NEEDS

Depending on requirements, the system can be installed indoors or outdoors. The lifting height is freely selectable up to 8 meters and also contributes to the lift's wide range of applications.

The **Sigma** is therefore an ideal solution for both public and private areas - even when retrofitted.



Configure your desired lift
easily with the configurator on
our website

COMPACT DESIGN

The **slim drive tower** guarantees minimum space requirements and can also be split if needed



OPTIONS AVAILABLE FOR CHOICE




The **Sigma** offers a wide range of additional options, making it a true all-rounder for a wide variety of installation situations.



Special RAL colour



Automatic door opener

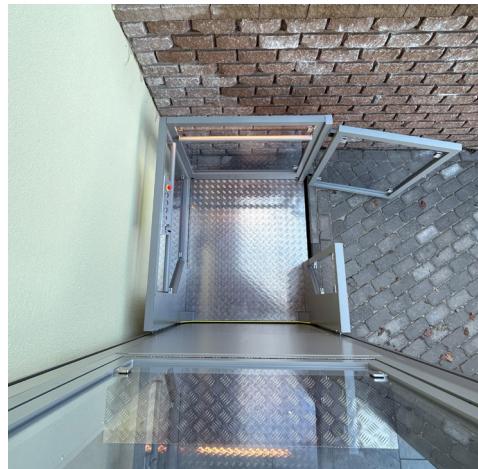

Side access at lower stop



Closed lift cabin
with 2 m door at the top



Safety curtain
up to 1.8 metres lifting height




Shaft
closed and 2 m door



Shaft
open and und 1.1 m door

TECHNICAL SPECIFICATIONS

Load capacity	385 kg
Lifting height	650 - 8000 mm
Max. Number of stops	4
Platform size	1100 x 1400 mm
Drive system	Double chain drive
Platform height min.	50 mm
Standard color	RAL 9022
Volume	Under 60 dB
Temperature	+45 to -15 °C
Drive motor	1,0 kW
Power supply	1 x 230 V
Emergency power supply	Integrated as standard
Certificates	Type-tested in accordance with EU Machinery Directive 2006/42/EC

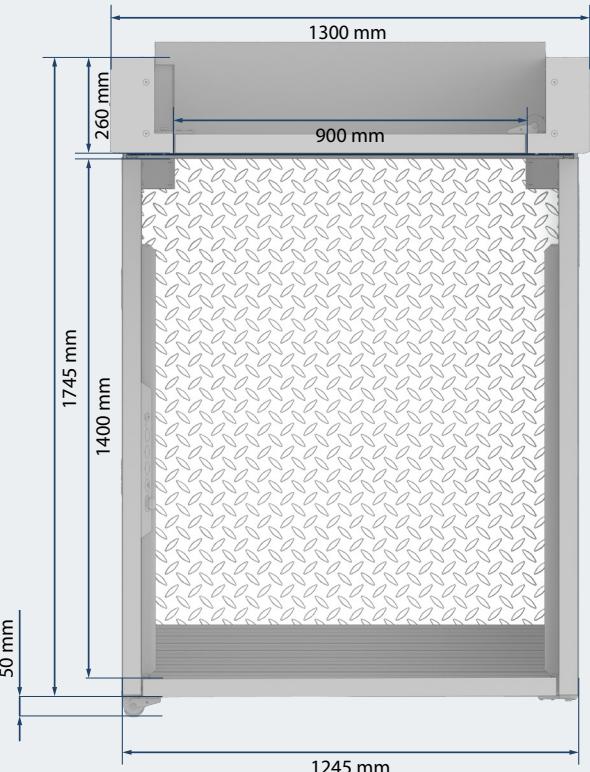

TIP

For large lifting heights or limited space at the installation area, we recommend ordering the drive tower in sections to facilitate installation.

FOR INDEPENDENCE
IN DAILY LIFE



Scan the QR code and
watch the
Sigma user video





Platform stairlifts



Chair stairlifts



Vertical platformlifts



Special lifts



Contact your dealer for
further information:



Official partner of:



Lehner Lifttechnik GmbH

Mitterweg 4

4722 Peuerbach

Austria

+43 7276 29 800

sales@lehnerlifttechnik.at

www.lehner-lifttechnik.com

Visit our website
for more details
about this lift

